

# Utilizing a Renewable Resource

eco  
energy

CARBON NEUTRAL



Forced Draft  
Combustion Air



Heavy Steel  
Burner Head



## Newmac Pellet Burner

### Features

- High fire output 120,000 BTUH
- Low fire output 60,000 BTUH
- Approved for new installation on all Newmac solid fuel furnaces and boilers
- Retrofit wood to pellet on any existing Newmac solid fuel installations
- Uses standard 2100 F solid fuel rated chimney
- Heavy Steel burner head
- Automatic Self Cleaning Burner Head
- Cartridge heater rod 1200F Igniter
- Emission range of 1.59 to 2.48 g/hr
- Pre-Programmed control operates feed rates and burner function automatically
- Simple operation by a single 2 Stage thermostat for automatic low and high fire operation
- Flexible feed hose connection permits easy maintenance of burner head and ash removal
- Burner head designed with Primary and Secondary Air supply

### Head Office

P.O. Box 9, Debert, Nova Scotia, B0M 1G0  
Phone: 902-662-3840 | Fax: 902-662-2581  
Email: newmac@newmacfurnaces.com

### Ontario Office

430 Springbank South, Woodstock, Ont. N4V 1B2  
Phone: 519-539-6147 | Fax: 519-539-0048  
Email: newmac@newmacfurnaces.com

www.newmacfurnaces.com





SAFTEY TEMPERATURE SENSOR



LCD DISPLAY



HOPPER ASSEMBLY



BURNER DOOR

# NEWMAC Pellet Burner

Utilizing a renewable carbon neutral resource

## Safety

- Conventional High Limit
- Integrated feed tube temperature limit control turns burner off at preset 170F safety
- Power to be disconnected to open fire door
- Burn-back gate to prevent fire backflow to hopper
- Photocell for flame detection
- Feed tube designed to prevent burn-back
- Photosensor to verify ignition
- Blocked Flue Manual Reset Safety Switch incorporated
- Existing Certified Furnace Clearances Maintained

## Programmable Control

- Burner control is factory programmed with no user input required
- High fire, low fire and standby modes
- Stand-by mode shuts burner down when there is no heat demand
- Standby mode restarts burner when thermostat calls for heat
- LCD display of operating parameters on burner control
- Top mounted display for easy viewing

## Pellet Hopper/Auger

- Field assembled hopper available
- Overfeed burner design to minimize mechanical components
- Modular design incorporating furnace, burner, thermostat, auger feed tube & storage hopper
- Flexible feed hose & suspended feed auger assembly
- 400 lb. capacity storage hopper
- Estimated ash removal interval for good quality pellets is 3 weeks based on average run time. Ash removal interval depends on pellet quality and degree of usage and may be more frequent
- Rotatable auger assembly

## Retrofit


- Approved to be installed on new or existing solid fuel installations
- Minor changes required to existing controls for pellet burner retrofit
- Specially designed firedoor for mounting pellet burner

## Approvals

- Solid Fuel Combination Safety Certification: CAN/CSA B366.1, UL 3 91
- Emissions Standards: Certified to CSA B415.1
- Applicable Installation Standards: NFPA 30/90B/211, CSA B365, & NBC

Check with local authorities having jurisdiction for additional requirements.

Due to continuous development and improvement, program specifications are subject to change without notice.

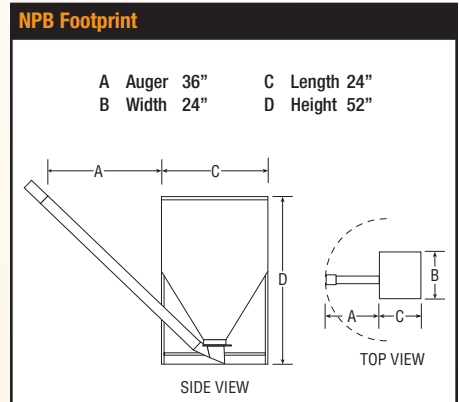

Newmac or its products are certified, listed or members of:



### Head Office

P.O. Box 9, Debert, Nova Scotia B0M 1G0  
 Phone: 902-662-3840 | Fax: 902-662-2581  
 Email: newmac@newmacfurnaces.com

### Ontario Office

430 Springbank South, Woodstock, Ont. N4V 1B2  
 Phone: 519-539-6147 | Fax: 519-539-0048  
 Email: newmac@newmacfurnaces.com

www.newmacfurnaces.com

2210180  
 Updated: September 2012  
 Printed: September 2012