

# No Utility Bills Inc.

[www.noutiltybills.com](http://www.noutiltybills.com)

Tel: (780)628-4835

#301 Lyall Subdivision, County of Athabasca, AB, Canada

VIEWINGS BY APPOINTMENT ONLY!

List Price From	
Sale Price From	
Prices are subject to change without notice! 071908	

## Opus 2 Faced See Through EPA Wood Fireplace

The Opus, the first and only EPA approved non-catalytic **see-through** fireplace.

With its appealing and modern design, the Opus is ideal for any open concept home. Both doors are functional, offering a very large and high viewing area. This exclusive fireplace comes completely assembled with a patented automatic air control, giving customers a user-friendly fireplace that they will enjoy for a lifetime.

Fuel	Wood
Estimated Btu Output	75,000
Heating Capacity	Up To 1,500 sq.ft.
Burn Rate	.83 kg/hr
Firebox Volume	Large 2.8 cu.ft.
Log Length (Max)	21 inches
Weight	230 lbs
Width	36 inches
Depth	16-1/2 inches
Height	40 inches
Flue Size	6 inches
Outside Air Size	4 inches
EPA Emissions	5.0 Grams per hour
Hearth Requirements	N.C. 18"D x 43"W
*Min Mantel Height	10" w @ 50" Up
*Minimum Chimney	15 Feet @ Sea Level
Testing	EPA, ULC-S610& UL-127

# SUPREME



### Options:

- Moldings come in antique brass and brushed nickel
- Doors available in gold and brushed nickel
- Decorative corners, in sets of two, come in black, antique brass or charcoal
- Hot Air Duct Kit



# No Utility Bills Inc.

[www.noutilitybills.com](http://www.noutilitybills.com)

Tel: (780)628-4835

#301 Lyall Subdivision, County of Athabasca, AB, Canada

VIEWINGS BY APPOINTMENT ONLY!





## Opus 2 Faced See Through EPA Wood Fireplace

### FEATURES:


- Stainless steel combustion chamber
- No refractory bricks, allowing a quicker and better heat transfer
- Combustion is controlled by a patented automatic air control
- Compact size
- Very large and high viewing area
- Comes completely assembled
- Both doors are functional
- Integrated ash pan
- Fireplace available in black or charcoal
- Tested and approved with a 6 inch chimney
- Can be installed inside a masonry chimney with a stainless steel liner
- Limited lifetime warranty

(please ask your dealer for more details)

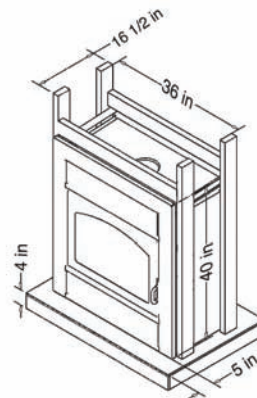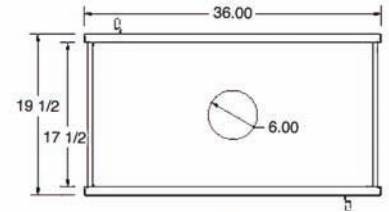

CANADA INSTALLATION

NOTE: Podium minimum height 4 in  
Podium maximum width 5 in

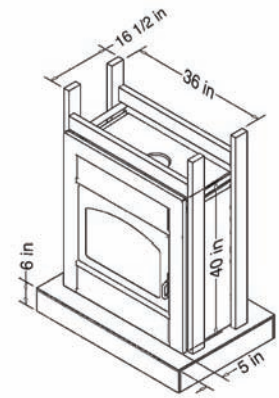


US INSTALLATION

NOTE: Podium minimum height 4 in  
Podium maximum width 5 in


### Ducting Options

The OPUS can accept up to two hot air ducts to heat rooms as far as 30 feet away.

This option is ideal for sending warm air to the basement.

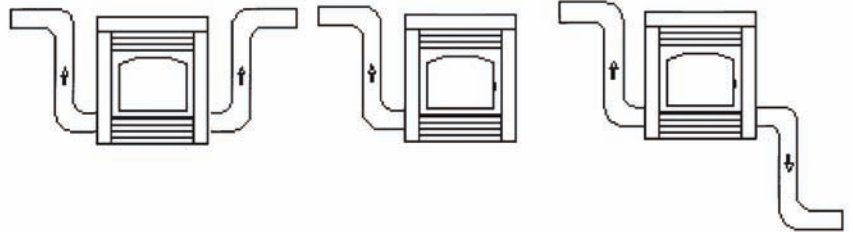

### Chimney Options

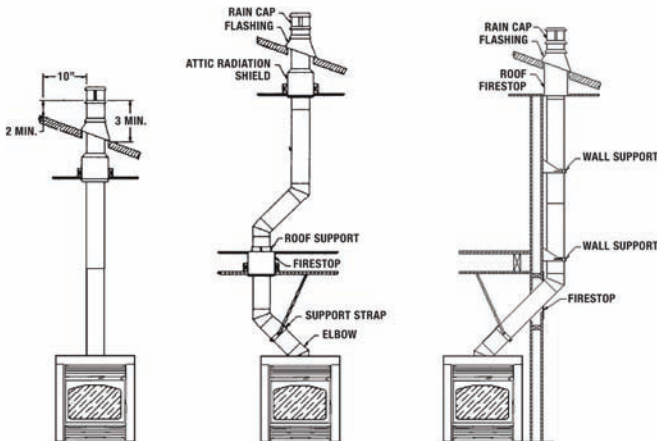

Opus can be installed with the following chimneys:

- Super Pro (model SPR or ALT), 6"
- Supervent (model JSC or JM), 6"
- Selkirk (model Ultra Temp or CF Sentinel), 6"
- Security Chimneys (model Secure Temp ASHT or S-2100), 6"
- Oliver MacLeod (model HT 6000), 6"
- ICC (model Excel 2100-2), 6"
- Simpson Dura-Vent (model Duratech HT or Duraplus HTC), 6"
- Metal Fab (model Temp Gard, class A), 6"
- American Metal (model Ameritec HS or HSS), 6"