


INSTALLATION TYPE B GAS VENT



Note: Showroom posters available upon request.

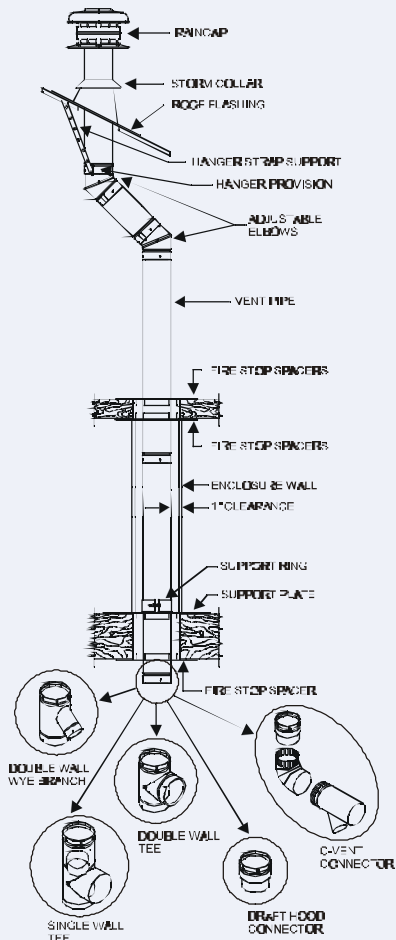

ECCO Manufacturing

CERTIFICATION

Listed by Underwriters Laboratories Inc. U.S.A.
File Number MH12111.



Listed by Underwriters Laboratories of Canada
File Number CMH609



Note: Connection to appliance to be in accordance with the installation code for gas burning appliances and equipment:

- NFPA 211 & 54 in U.S.A.
- CSA B149 in Canada

and/or the requirements of the local authorities having jurisdiction.

LANGLEY

19860 Fraser Hwy.
Langley, BC
Canada V3A 4C9

Tel.: (604) 530-4151

CALGARY

7220 Barlow Trail S.E.
Calgary, AB
Canada T2C 2E1

Tel.: (403) 720-0895

KENT

22259 West Valley Hwy.
Kent, Washington
U.S.A. 98032

Tel.: (253) 872-3721

Fax Lines:

Fax: (403) 720-0897

Fax: (253) 872-3724
TollFree: 1-800-207-6859

Marketing Office:

(604) 533-9335


Distribution Office:

(604) 530-1133

E-Mail and Web Address

marketing@ecomfg.com
www.ecomfg.com


For further information, please call:
Factory Authorized Distributor



PRINTED IN CANADA



RESIDENTIAL & COMMERCIAL TYPE B GAS VENT

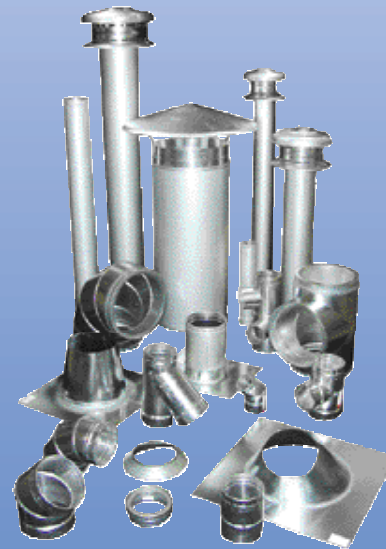

MODEL E/R 3 in-8 in (Quick Lock)
MODEL E/V 10 in-30 in

MODEL E/R 3 in-8 in (Quick Lock)

RESIDENTIAL (Model E/R)

ECCO Type B Gas Vent, Model E/R (Quick Lock) is designed for venting all approved propane and natural gas appliances. Model E/R is available in sizes 3 in to 8 in diameter with many prefabricated components to meet all installation needs.

THE ECCO ADVANTAGES

DURABILITY

ECCO Type B Gas Vent, Model E/R is manufactured with high-quality material and workmanship. The outer galvalume (superior to galvanized) casing and the inner conduit of aluminum meet the highest testing standards of UL and ULC.



SIMPLE INSTALLATION

ECCO Type B Gas Vent, Model E/R has a unique Quick Lock System which allows greater ease of assembly and disassembly. To ensure correct installation, each vent section is clearly marked with a positive connect indicator. Installations are completed quickly, saving you time and money. If necessary, the ECCO Type B Gas Vent, Model E/R can be disassembled with a counterclockwise twist.

SAFETY

ECCO Type B Gas Vent, Model E/R is precision manufactured to ensure consistent quality and fit. The double wall air-insulated design and tight-fitting joints assure rigidity and strength. Top edges are rollformed to eliminate sharp edges. When properly installed the vent cannot come apart through vibration, thus offering protection against vent failure or fire hazard.

MODEL E/R 3 in-8 in (cont d)

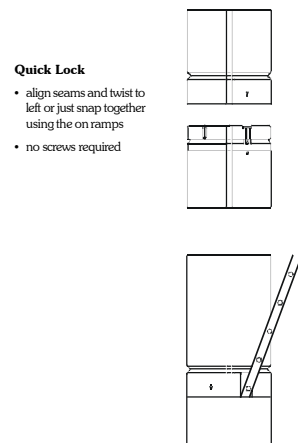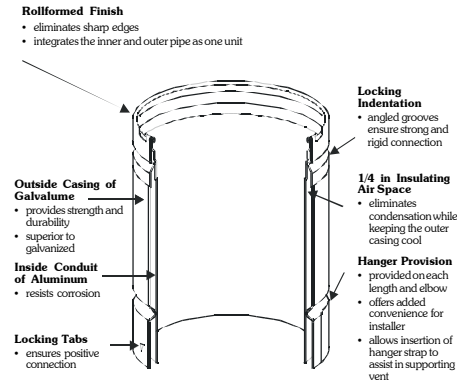

MODEL E/V 10 in-30 in

COMMERCIAL (Model E/V)

ECCO Type B Gas Vent, Model E/V is a prefabricated metal vent used for venting approved gas burning equipment with flue gas temperatures at the draft hood not exceeding 470 deg F (245 deg C). Model E/V is available in sizes of 10 in to 30 in in diameter.

THE ECCO ADVANTAGES

DURABILITY

ECCO Type B Gas Vent, Model E/V consists of formed couplers which maintain a 1 in air wall between the inner conduit of aluminum and the outer casing of galvalume. Both the aluminum and galvalume offer high resistance to potential corrosion from products of combustion and ever increasing environmental effects.

SIMPLE INSTALLATION

Prestamped holes are formed in the male and female couplers making it easy to align lengths and insert screws provided with each component. This method is your assurance that the system will not come apart after installation. Large inventories of components are stocked in sizes of up to 30 in in diameter which give ECCO the ability to respond fast to all requirements.

SAFETY

All components for ECCO Type B Gas Vent, Model E/V meet the highest standards recommended by UL and ULC.

